


# Female Header 8,50 mm Height, 2,54 mm

Series

**094**

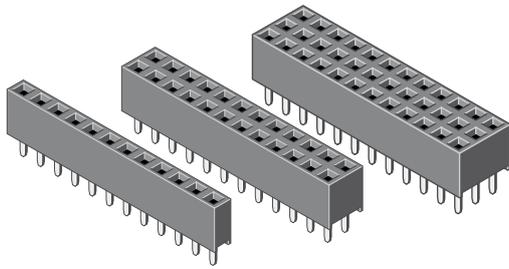

Rated current	3,0 A
Rated voltage	250 V <sub>RMS</sub> / V <sub>DC</sub>
	Please consider air- and creepage distances
Withstand voltage	500 V <sub>RMS</sub> for one minute
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds







pitch	<b>2,54</b>
termination	
mating pin size	<input type="checkbox"/> <b>0,64</b>
max. pincount	<b>040/080/120</b>

All dimensions in mm.

## Variation

## PCB Layout

Product group  
**4**

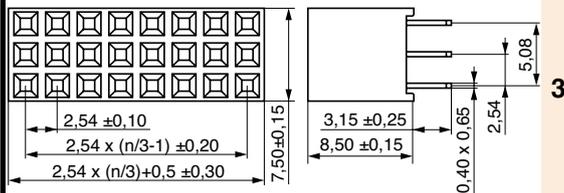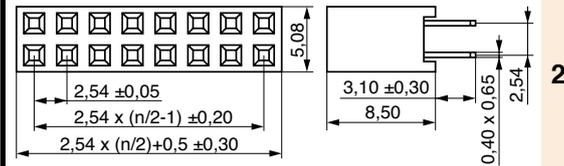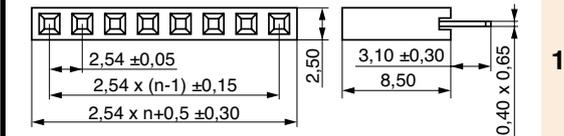

Plating:  
T = Sn  
F = Au  
S = Selective Au

\* No. of contacts:  
Variation 1 = 002 - 040  
Variation 2 = 004 - 080  
Variation 3 = 006 - 120

Variation (1,2,3)

No. of contacts \*  
(002,... - 120)

Plating contact (T,F,S)



www.mpe-connector.de

Order code:

**094 - 1 - 222 - 0 - N X - Y S 0**

Mating series	<b>087</b>	<b>089</b>	<b>090</b>	<b>585</b>	<b>088</b>	<b>334</b>	<b>368</b>	<b>296</b>												
see page	3-37	3-38	3-39	3-40	3-41	3-42	3-43	3-53												

MPE-Garry GmbH • Schäßlerstraße 13 • 87629 Füssen • Germany • Phone: +49 (0) 83 62 / 91 56-0 • Fax: +49 (0) 83 62 / 91 56-500 • Email: vk@mpe-connector.de • www.mpe-connector.de

CS17081\_V3