

Lithium Ion Battery

which pin is +??

Max 80 mV across sense resistor => 500 mA max


I2C Address 0x70h

Microcontroller


Digital Microphone

VCC_RF is for powering active antenna if it also operates at VCC MAX-M8 DNI inductor if not used

Default 0x42 I2C address

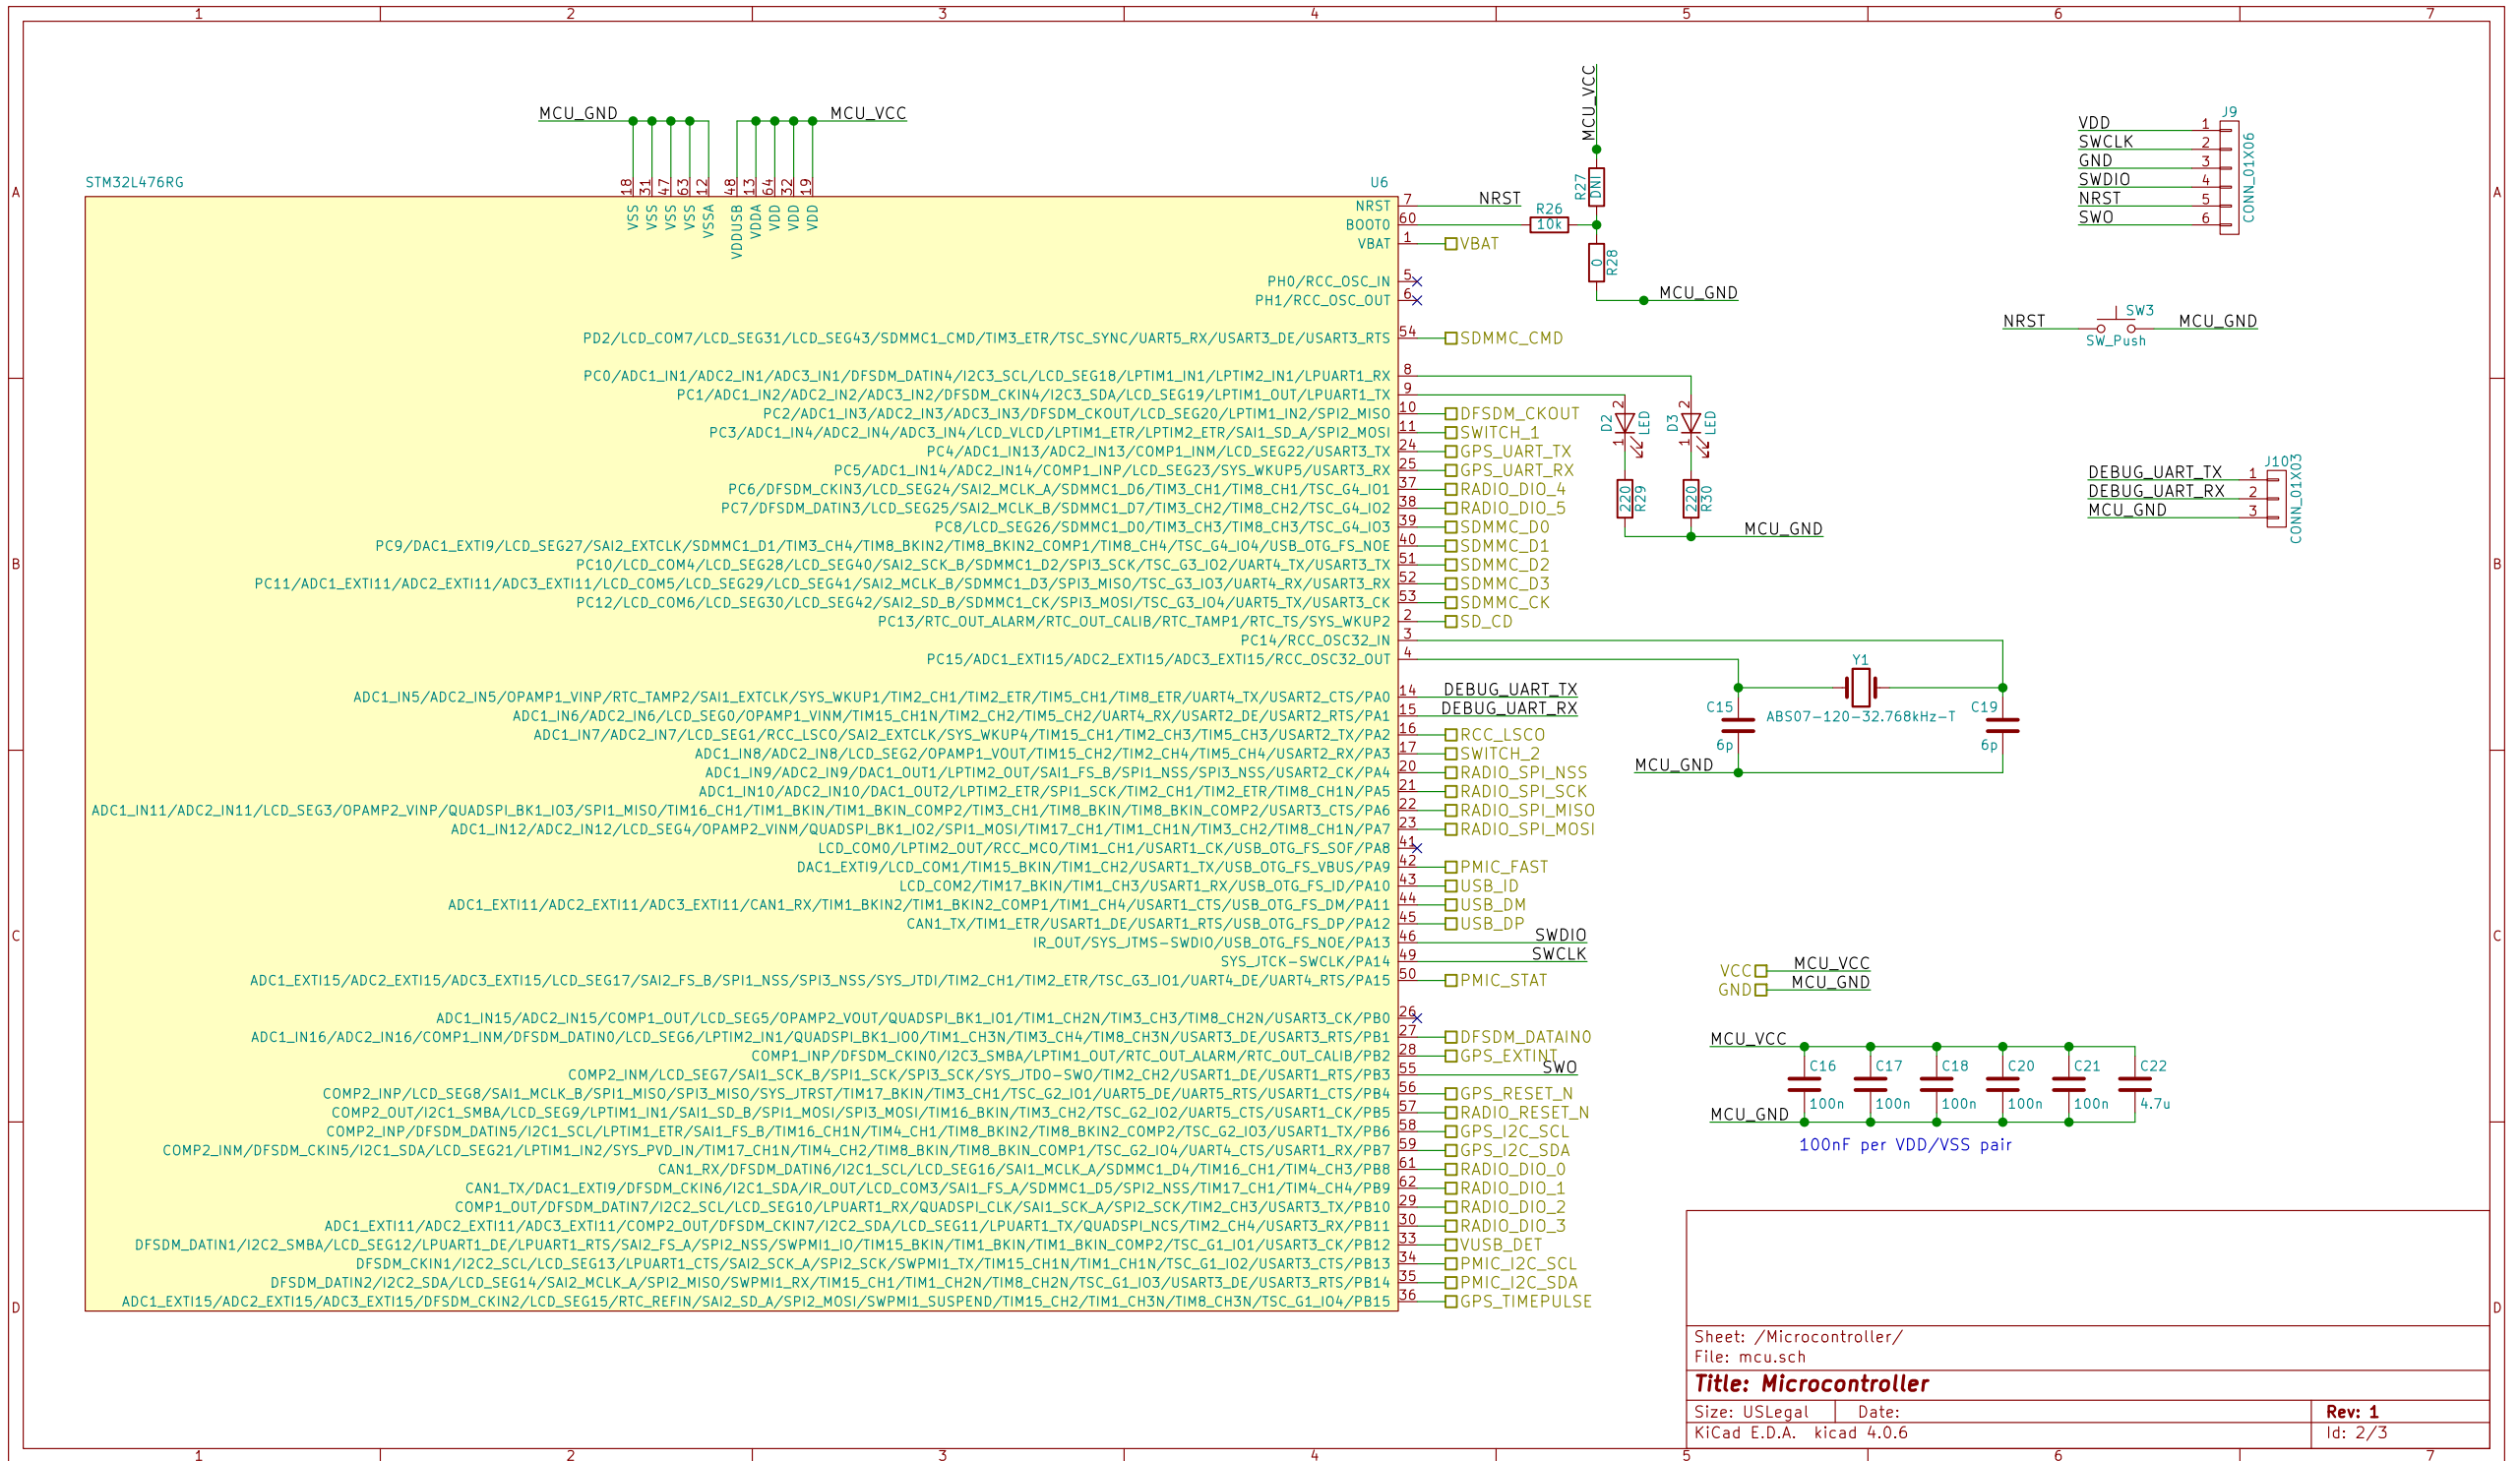

Sheet: /Microcontroller/	
File: mcu.sch	
Title: Microcontroller	
Size: USLegal	Date:
KiCad E.D.A. kicad 4.0.6	Rev: 1
	Id: 2/3

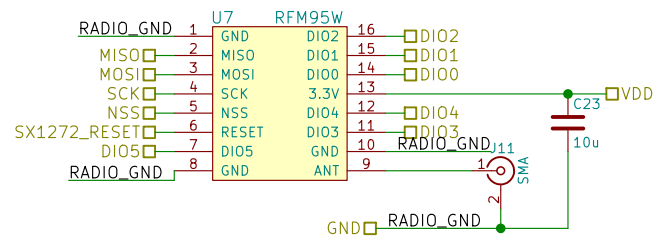

Sheet: /SX1272/
 File: SX1272.sch

Title: LoRa Transceiver

Size: A4
 KiCad E.D.A. kicad 4.0.6

Date:
 Rev: 1
 Id: 3/3